

ROOM FINISH SCHEDULE

NO.	ROOM NAME	FLOOR	BASE	WALL MATERIAL/ FINISH	TRIM	CEILING	CEILING HEIGHT	NOTES AND COMMENTS
100	VESTIBULE	NEW OPT-1	EXIST/NEW MGRB NEW VB-1	EXIST CMU - CLEAN. EXIST / NEW GYP BD - PAINT P-7(A). EXIST / NEW WALL PANELS (WP-1)	EXIST STAINLESS STEEL CORNER GUARDS	EXIST GYP BD - PAINT P-7(D)	11'-10"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
101	SALES AREA	EXIST/NEW VCT-2 @ PERIMETER VCT-3 @ CENTER NEW OPT-1	EXIST VB-1	EXIST WALL PANELS (WP-1) w/P-7(A) @ GYP BD ABOVE UP TO CEILING AT FRONT WALL. EXIST WP-1 w/ P-13(A) STRIPE & P-7(A) @ GYP BD ABOVE UP TO CEILING AT ALL OTHER SALES WALLS.	EXIST WOOD-PAINT P-3(A) / EXIST STAINLESS STEEL CORNER GUARDS	EXIST ACT-1. EXIST EXPOSED STRUCTURE. EXIST GYP BD - PAINT P-7(D).	EXISTING	FINISH SCHEDULE NOTES #1, 3, 5, 7-REFER TO DOOR SCHEDULE. 13, 15, 16, 17, & 19- USE POLYAMIDE HIGH-BUILD LOW GLOSS PAINT AT ALL CMU WALLS IN SALES AREA. COORDINATE ALL PAINTING IN SALES AREA W/ FOOD LION CONSTRUCTION SUPERVISOR.
102*	E-COMMERCE ROOM	NEW VCT-2	NEW VB-1	EXIST / NEW GYP BD - PAINT P-7(A). EXIST / NEW WALL PANELS (WP-1).	NEW STAINLESS STEEL CORNER/JAMB GUARDS	EXIST GYP BD - PAINT P-4(D)	11'-10"	FINISH NOTE #1 - MATCH EXISTING HEIGHT OF WALL PANELS. WRAP NEW OPENING W/ STAINLESS STEEL.
103	ASSOCIATE'S TRAINING ROOM	EXIST VCT-3	EXIST VB-1	EXISTING WALL PANELS. EXISTING GYP BD - PAINT P-7(A).	P-3(B) PANEL COVERS	EXIST GYP BD - PAINT P-4(D)	11'-11"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE. PAINT VISIBLE WOOD UNDER SHELVES AND COUNTERS P-3 (B). EXISTING COUNTER & SHELF TO REMAIN.
104	WORKROOM	EXIST VCT-3	EXIST VB-1	EXIST GYP BD - PAINT P-1(A). EXIST WALL PANELS - DO NOT PAINT.	P-3(B) @ SAFE (INSIDE & OUTSIDE WORK ROOM), AROUND DOORS, PANEL COVERS	EXIST GYP BD - PAINT P-4(D)	11'-11"	FINISH SCHEDULE NOTES #1, 7-REFER TO DOOR SCHEDULE & 16. PAINT VISIBLE WOOD UNDER SHELVES & COUNTERS P-3(B).
105	STORAGE OFFICE	EXIST VCT-3	EXIST VB-1	EXIST WALL PANELS.	-	EXIST GYP BD - PAINT P-4(D)	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE. PAINT VISIBLE WOOD UNDER SHELVES AND COUNTERS P-3 (B). EXISTING COUNTER & SHELF TO REMAIN.
106	HBC ROOM	EXIST CONC	EXIST VB-1	EXIST GYP BD - PAINT P-7(A). EXIST CMU - PAINT P-7(C).	-	EXIST PLWD - PAINT P-4(B) EPOXY	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
107	MOP CLOSET	EXIST CONC	EXIST VB-1	EXIST FRP PANELS	-	EXIST GYP BD - PAINT P-4(D)	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
108	DAIRY COOLER	EXIST CS	EXISTING	EXIST PREFAB PNL - SEE NOTES & COMMENTS	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #12-SALES FLOOR SIDE ONLY.
109	ICE CREAM FREEZER	EXIST MTP	FRPB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	-
110	ELECTRICAL AREA	EXIST CS	-	EXIST CMU	-	EXPOSED STRUCTURE	-	-
111	MECHANICAL ROOM	EXIST CS	-	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE.
112	STORAGE FREEZER	EXIST MTP	FRPB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	-
113	GROCERY STAGING / RECEIVING	EXIST CS	EXISTING	EXIST CMU	-	EXPOSED STRUCTURE	EXIST	FINISH SCHEDULE NOTES #2, 4, 7-REFER TO DOOR SCHEDULE.
114	MEAT PREP	EXIST QT	EXIST QTB	EXIST WHITE FRP.	-	EXIST ACT-2	9'-10"	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING
114A	MEAT COOLER	EXIST QT	EXIST QTB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	HOT PRESSURE WASH EXISTING FLOORING
114B	MEAT FREEZER	EXIST MTP	FRPB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	-
115	MEAT OFFICE	EXIST QT	EXIST QTB	EXIST FRP PANELS	-	EXIST PLWD - PAINT P-4(B) EPOXY	7'-10 1/2"	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE.
116	JANITOR'S ROOM	EXIST CS	-	EXIST CMU - PAINT P-4(C) EPOXY	-	EXIST PLWD - PAINT P-4(B) EPOXY	8'-0"	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING CAN WASH.
117	DEPARTMENT MANAGER'S OFFICE	EXIST VCT-3	EXIST VB-1	EXISTING WALL PANELS.	P-3(B)	EXIST GYP BD - PAINT P-4(A)	8'-0"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE. PAINT VISIBLE WOOD UNDER SHELVES AND COUNTERS P-3(B). EXISTING COUNTER & SHELF TO REMAIN.
118	LOUNGE	EXIST VCT-3	EXIST VB-1	EXISTING WALL PANELS.	-	EXIST ACT-1	8'-0"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE.
119	RESTROOM #2	EXIST RESINOUS	EXIST RESINOUS	EXIST CWT	CEILING TRIM - PAINT P-4(A)	EXIST GYP BD - PAINT P-4(A)	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
120	RESTROOM #3	EXIST CT	EXIST CTB	EXIST CWT	CEILING TRIM - PAINT P-4(A)	EXIST GYP BD - PAINT P-4(A)	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
121	DELI / BAKERY PREP	EXIST QT	EXIST QTB	EXISTING CWT FIELD	P-18(B) PANEL COVERS	EXIST ACT-3	9'-11"	RE-SHEET A2.02. FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
121A	DELI / BAKERY COOLER	EXIST QT	EXIST QTB	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #12. HOT PRESSURE WASH EXISTING FLOORING.
121B	DELI / BAKERY FREEZER	EXIST MTP	EXISTING	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #12
122	DELI / BAKERY STORAGE	EXIST QT	EXIST QTB	EXISTING CMU - PAINT P-4(C). EXISTING FRP PANELS.	-	EXIST PLWD - PAINT P-4(B) EPOXY	8'-0"	FINISH SCHEDULE NOTES #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
123	DELI / BAKERY CLOSET	EXIST QT	EXIST QTB	EXIST FRP PANELS.	-	EXIST PLWD - PAINT P-4(B) EPOXY	8'-0"	FINISH SCHEDULE NOTES #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
124	STORAGE ROOM	EXIST CS	-	EXIST GYP BD - PAINT P-7(A). EXIST CMU - PAINT P-7(C).	-	EXIST GYP BD - PAINT P-4(D)	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
125	CORRIDOR #2	EXIST VCT-2	EXIST VB-1	EXIST WALL PANEL (WP-1). EXIST GYP BD - PAINT P-7(A).	-	EXIST ACT-1	9'-6"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE.
126	PRODUCE PREP	EXIST CS - APPLY NEW SEALER	-	EXIST FRP - CLEAN. EXIST CMU - PAINT P-4(C) EPOXY	-	EXIST ACT-2	9'-11"	FINISH SCHEDULE NOTES #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING. REMOVE EXIST WD BASE AT CMU WALLS.
126A	PRODUCE COOLER	EXIST CS - APPLY NEW SEALER	-	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #2. HOT PRESSURE WASH EXISTING FLOORING.
127	RISER ROOM	EXIST VCT-2	EXIST VB-1	EXIST GYP BD - PAINT P-7(A)	-	EXIST GYP BD - PAINT P-4(D)	8'-0"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE.
128	CORRIDOR #1	EXIST VCT-2	EXIST VB-1	EXIST WALL PANEL (WP-1).	EXIST STAINLESS STEEL CORNER GUARDS.	EXIST GYP BD - PAINT P-4(D)	9'-0"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE.
129	WOMEN'S RESTROOM	EXIST CT	EXIST CTB	EXIST CWT	CEILING TRIM - PAINT P-4(A)	EXIST GYP BD - PAINT P-4(A)	7'-11 1/2"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE. INSTALL NEW STAINLESS STEEL PANELS BEHIND NEW THINAIR HAND DRYERS IF NECESSARY. EXISTING SPLASH GUARDS TO REMAIN BELOW HAND DRYERS.
130	MEN'S RESTROOM	EXIST CT	EXIST CTB	EXIST CWT	CEILING TRIM - PAINT P-4(A)	EXIST GYP BD - PAINT P-4(A)	7'-11"	FINISH SCHEDULE NOTE #7-REFER TO DOOR SCHEDULE. INSTALL NEW STAINLESS STEEL PANELS BEHIND NEW THINAIR HAND DRYERS IF NECESSARY. EXISTING SPLASH GUARDS TO REMAIN BELOW HAND DRYERS.

GENERAL NOTES:

- ALL CONSTRUCTION TO BE TYPE IIB OR BETTER (NCSBC)
- REFER TO SHEET A1.04 FOR ADDITIONAL CEILING INFORMATION.
- REFER TO SHEET A2.02 FOR SALES FINISH
- REFER TO CS-1 FOR NATIONAL ACCOUNT INFORMATION
- REPLACE ANY BROKEN/ DAMAGED MATERIALS (ACT, FLOOR/WALL TILE, ETC.) TO MATCH EXISTING UNLESS NEW SPECIFICATION IS LISTED.
- DO NOT PAINT POLISHED ALUMINUM TRIM.
- REFER TO A1.05 FOR FLOOR FINISHES.
- ALL FLOOR FINISHES TO COMPLY W/ NCSBC 804.4.
- ALL CEILING AND WALL FINISHES TO COMPLY W/ NCSBC 803.11.
- ALL CAN WASHES TO COMPLY W/ NCSBC 1210.2.2.

FINISH SCHEDULE NOTES (35-17 DECOR):

- MARLITE BRAND PANELS (MBP): USE TRADITIONAL PROFILE ALUMINUM TRIM PIECES WITH A FACTORY FINISH TO MATCH MARLITE. INSTALL MARLITE BRAND PANELS PER MANUFACTURER'S SPECIFICATIONS. USE ONLY ACCEPTABLE ACCESSORIES.
  - SEE FINISH MATERIAL/COLOR LEGEND FOR NEW MARLITE BRAND PANELS (WP-1)
- CALLK 2x6 P.T. WOOD BASEBOARD AT COOLER/FREEZER PANELS & METAL STUD WALLS IN REAR AREA, TOP AND BOTTOM. PAINTED WITH P-4(B).
- ALL GYPSUM WALLBOARD TO BE PATCHED, TAPED, MUDDED AND SANDED (PAINT READY).
- GENERAL CONTRACTOR SHALL PAINT FIRE LANES IN REAR AREAS, IF REQUIRED.
- NEW MILLWORK LAMINATE TO BE WILSONART #4842-60 "DESERT BEIGE" MATTE FINISH, REFER TO A4.06, PAINT EXISTING SUPPORTS & EXPOSED WOOD P-3(B) U.N.O. NEW SUPPORTS TO BE LAMINATED TO MATCH WORK SURFACE.
- REFER TO A4.03 & A2.02 FOR RESTROOM TILE & DELI-BAKERY-TILE.
- DOORS AND FRAMES CUSTOMER FACING TO BE PAINTED P-3(B) & NON-CUSTOMER FACING P-3(B), UNLESS OTHERWISE NOTED. (EXCEPT ALUM. STOREFRONT DOORS & WINDOWS)
- WORKROOM COUNTER TO BE 2'-10" AFF / COUNTER IN DMO TO BE 2'-6" AFF. SHELVES TO BE 5'-8" AFF, SEE SHEET A4.06.
- ALL WOOD TRIM AT CEILINGS, TO BE PAINTED P-7(B)
- RESINOUS DECORATIVE FLOORING SHALL BE PURCHASED FROM DUR-A-FLEX INC. (CONTACT: KEVIN STEPHENS 919-208-8662), OR PROTECTIVE INDUSTRIAL POLYMERS (CONTACT: STEVE McCAMEY AT 804-937-5000).
- NOT USED
- PRE-FAB COOLER/FREEZER PANELS AND DOORS TO BE PAINTED P-18(C); COORDINATE PAINT METHOD W/FOOD LION CONSTRUCTION MANAGER.
- COORDINATE WITH FOOD LION CONSTRUCTION MANAGER FOR PAINTING OF WALLS, DOORS & FRAMES.
- PROVIDE 4" HIGH FIRE RETARDANT (FRT) PLYWOOD WITH FRT 2x6 WOOD BASE @ EXPOSED COOLER/FREEZER WALLS - PAINT BASE PER NOTE #2 AND LEAVE PLYWOOD UNFINISHED.
- ALL WALLS BELOW 8' WITHOUT WALL PANELING SHALL BE PAINTED WITH P-7(B), EXCEPT THE SALES FLOOR WILL RECEIVE NEW WALL COVERING (SEE A2.02).
- SAFE & TRIM TO BE PAINTED P-3(B) ON SALES AREA SIDE AND P-3(B) ON WORK ROOM SIDE. (SAFE TO BE HAND MACHINE ROLLED NOT BRUSHED).
- ALL SALES FLOOR C/WB WALLS TO RECEIVE SHERWIN WILLIAMS PROBLOCK OIL BASED PRIMER PRIOR TO PAINTING - SALES FLOOR ONLY.
- NOT USED
- SALES AREA & VESTIBULE COLUMNS TO BE SANDED, PRIMED & PAINTED P-7(B) EPOXY. DO NOT PAINT STAINLESS STEEL WRAPS.
- AT-GYP-BD-WALL & CMU LOCATIONS, NEW AGROVYN WALL COVERING WP-8 (SET @ 1/2" AFF) W/ CR-1 & PAINT GYP BD SURFACE ABOVE WALL COVERING TO CEILING / DECK - INSTALL USING ONLY AGROVYN INTERIOR HEAVY-DUTY WATER-BASED MASTIC PRIMER & ADHESIVE AND AGROVYN COLOR-MATCHING TRIM PIECES - SEE DETAILS 5 & 6/A3.02

FINISH MATERIAL/COLOR LEGEND:

FLOORS: (SEE SHEETS A1.05 FOR SPECIFIC MATERIALS)

- CARPET  
OPT-1 CARPET-PORTICO DIPLOMAT "MINK"  
CONCRETE  
CS CONCRETE SEALER  
QUARRY TILE  
QT QUARRY TILE  
CERAMIC TILE  
CT CERAMIC TILE  
VINYL TILE  
VCT-1 VINYL COMPOSITION TILE - ARMSTRONG-PREMIUM-EXCELON  
RAFFIA-STREAM - EARTH-55926-12x24"  
VCT-2 VINYL COMPOSITION TILE- EXCELON IMPERIAL TEXTURE "EARTHSTONE GREIGE" 12"x12"  
VCT-3 VINYL COMPOSITION TILE- EXCELON IMPERIAL TEXTURE "ANTIQUE WHITE" 12"x12"
- RESINOUS  
R-1 RESINOUS TOPPING - COLOR FOOD LION #FL105. SEE FINISH SCHEDULE NOTE #10.  
R-2 RESINOUS TOPPING - COLOR FOOD LION #FL106. SEE FINISH SCHEDULE NOTE #10.
- OTHER  
MTP METAL TREAD PLATE
- BASE:  
VINYL  
VB-1 4" VINYL COVE BASE BY JOHNSONITE- MATTE BLACK 40  
QUARRY TILE  
QT QUARRY TILE  
CERAMIC TILE  
CTB CERAMIC TILE  
OTHER  
MGRB McCUE BOX RAIL  
WD 2x6 P.T. WOOD

CEILING FINISHES: (SEE SHEET A1.04)

- ACT-1 2X4 ARMSTRONG HUMAGUARD PLUS IN PRELUDE XL GRID  
ACT-2 2X4 2" FOAM DOUBLE SIDED FIBERLITE FRP PANEL BY NUDD PRODUCTS  
ACT-3 2X4 ARMSTRONG VINYL CLAD TILE IN PRELUDE XL GRID
- FRP FIBER REINFORCED PANEL  
GB PAINTED GYPSUM BOARD
- TRIM:  
STAINLESS  
ST-1 SCHLUTER- DILEX-EHK EBKH11-011 STAINLESS STEEL COVE BASE  
ST-2 SCHLUTER- RONDEC RD100E STAINLESS STEEL TRIM  
ACROVYN  
CR-1 ACROVYN 4000 FR-225N ACCENT RAIL (BLACK)

INTERIOR WALL FINISH PAINTING LEGEND:

- (A) EG-SHEL  
(B) SEMI-GLOSS  
(C) LOW GLOSS  
(D) FLAT  
(E) ELECTROSTATIC

WALLS SURFACES: (REFER TO SHEET A2.02)

- WALL PANELS/COVERING  
WP-1 NOVATO OAK #329-S2 MARLITE PANEL  
WP-2 CODY #194 MARLITE PANEL  
WP-3 (NOT USED)  
WP-4 (NOT USED)  
WP-5 (NOT USED)  
WP-6 (NOT USED)  
WP-7 (NOT USED)  
WP-8 (NOT USED)  
WP-9 WHITE P-100 MARLITE FRP  
WP-10 (NOT USED)  
WP-11 (NOT USED)
- PAINT: (REFER TO SHEET A2.02)  
P-1 PAINT "SOFTER TAN" SW6141  
P-2 (NOT USED)  
P-3 PAINT "MACADAMIA" SW6142  
P-4 PAINT "PURE WHITE" SW7005  
P-5 (NOT USED)  
P-6 (NOT USED)  
P-7 PAINT "MARSHMALLOW" SW7001  
P-8 PAINT "HIGHWAY TRAFFIC WHITE"  
P-9 PAINT "POPULAR GRAY" SW6071  
P-10 PAINT "TOMY TAUPE" SW7036  
P-11 (NOT USED)  
P-12 PAINT "TRAFFIC YELLOW"  
P-13 PAINT "MEDITATIVE" SW6227  
P-14 (NOT USED)  
P-15 (NOT USED)  
P-16 (NOT USED)  
P-17 (NOT USED)  
P-18 PAINT "SMOKY BEIGE" SW8087
- PLASTIC LAMINATE:  
PL-1 (NOT USED)  
PL-2 FORMICA 4842-60 "DESERT BEIGE" (MATTE FINISH)



PROFESSIONAL'S SEAL:




CORPORATE SEAL:



REVISIONS

NO DATE REMARKS

END

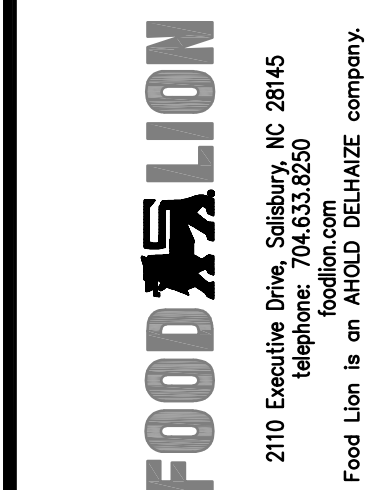

FOOD LION  
REMODEL  
STORE #1657  
4330 E. TENTH STREET  
GREENVILLE, NC

PROJECT NO: 1657FLMK22

DATE: 08/29/2022

17 OF 40

A6.01

ROOM FINISH  
SCHEDULE

CHECKED: A.J.L. DRAWN: VPS