

7B PLUMBING PLAN
SCALE: 3/32" = 1'-0"

PLUMBING LEGEND


SYMBOL/ABBREVIATION	DESCRIPTION	SYMBOL/ABBREVIATION	DESCRIPTION
	EXISTING TO BE REMOVED	FCO	FLOOR CLEANOUT
	EXISTING PIPING (SHOWN LIGHT)	GCO	GRADE CLEANOUT
	GREASE WASTE PIPING	HD	HUB DRAIN (HD)
	SANITARY WASTE PIPING	FD	FLOOR DRAIN/SINK (FD)/(FS)
	INDIRECT WASTE PIPING	OC	OVERFLOW CLEANOUT
	VENT PIPING	VTR	VENT THROUGH ROOF
	COLD WATER PIPING (CW)	A.A.V.	AIR ADMITTANCE VALVE
	HOT WATER PIPING (HW)	WHA	WATER HAMMER ARRESTOR
	PIPE UP	◆	NEW CONNECTION POINT
	PIPE DROP		
	CAPPED PIPE		
	BALL VALVE		
	HOSE BIBB		

- PLAN NOTES**
- EXISTING HUB DRAIN. MODIFY AS NEEDED TO MAKE CONNECTION TO NEW CASE.
 - HUB DRAIN. SEE DETAILS PSD-1 AND PSD-1 ON DRAWING P5.1.
 - HAND SINK, EL18X. PROVIDE AND INSTALL NEW P-TRAP, SUPPLIES AND STOPS AND CONNECT TO EXISTING PIPING IN WALL. PROVIDE AND INSTALL THERMOSTATIC MIXING VALVE, IMV1. SEE DETAIL 2 ON DRAWING P5.1.
 - INSTALL EXISTING CASSETOP HOSE BIBB PER DETAIL PSD-21 ON DRAWING P5.1.
 - PIPE AIR ADMITTANCE VALVE, A.A.V., HIGH TO FLUSH WITH TOP OF CASE FOR SERVICING.
 - 1/2" HOT WATER TO HOSE BIBB, HB-2. SEE DETAIL PSD-21 ON DRAWING P5.1 FOR CASSETOP HOSE BIBB DETAIL.
 - 1/2" COLD WATER TO EXISTING DISCONNECTED SEAFOOD STEAMER. INSTALL A WATTS LF90 LEAD FREE (ASSE 1012) BACKFLOW PREVENTER. RUN DRAIN TO FLOOR SINK UNDER 3-COMPARTMENT SINK. INSTALL OWNER PROVIDED EYEWASH RETROFIT KIT. KIT WILL INCLUDE ASSE 1071 TEMPERING VALVE WITH COLD WATER BY-PASS, HAND HELD EYEWASH/ORENCH HOSE AND WALL BRACKET. REFER TO SPECIFICATION SECTION 224200.
 - 2 LEVER SPRAY DOWN PROPORTIONER, GE235-2C TO HAVE A 3/4" COLD WATER HOSE BIBB, HB1.
 - HAND SINK, EL18X. TIE INTO EXISTING PIPING IN WALL. CONNECT NEW 1/2" VENT LINE TO CLOSEST VENT LINE.
 - MATCH EXISTING PIPE SIZE.
 - SEE PSD-16B ON DRAWING P5.1 FOR FLOOR SINK, FD-6.
 - 3/4" HOT AND COLD WATER TO RELOCATED 3-COMPARTMENT SINK, PL3C-18X15. SEE DETAIL PSD-7 ON DRAWING P5.1 FOR 3-COMPARTMENT SINK. INSTALL RELOCATED HOT AND COLD WATER HOSE BIBBS UNDER SINK.
 - 1/2" HOT AND COLD WATER TO 1-COMPARTMENT SINK, EL18C-18. SEE DETAIL PSD-5A ON DRAWING P5.1 FOR 1-COMPARTMENT SINK.
 - 1/2" HOT AND COLD WATER TO RELOCATED HAND SINK, EL18X. INSTALL RELOCATED UNDER-SINK RE-CIRCULATION PUMP AND PIPE PER EXISTING CONDITIONS PRIOR TO REMOVAL AND REINSTALLATION. PROVIDE AND INSTALL DATEY SURE-VENT AIR ADMITTANCE VALVE WALL BOX.
 - REINSTALL EXISTING PLUMBING FIXTURE AFTER RESTROOM WALL AND FLOOR WORK IS COMPLETE.
 - COUNTERTOP SINK, EL18C OR PL3C-2B. INSTALL NEW P-TRAP, INSULATION AND SUPPLIES AND STOPS AND CONNECT TO EXISTING PIPING. SEE DETAIL PSD-50 ON DRAWING P5.1.
 - LOWEED FLOOR DRAIN. MODIFY EXISTING PIPING FOR FLOOR DRAIN TO BE FLUSH WITH FINISHED FLOOR.
 - 3/4" COLD WATER TO SEAFOOD WATER FILTER SYSTEM, ELSEWF. INSTALL A WATTS NO. LF90 (ASSE 1012) AND PIPE RELIEF TO NEAREST DRAIN.
 - 3/4" COLD WATER TO WATER FILTER SYSTEM, ELDFW2. INSTALL A WATTS NO. LF90 (ASSE 1012) AND PIPE RELIEF TO HUB DRAIN.
 - 3/4" COLD WATER TO WATER FILTER SYSTEM, ELDFW1. INSTALL A WATTS NO. LF90 (ASSE 1012) AND PIPE RELIEF TO HUB DRAIN.
 - COMBI-OVEN (EQUAL TO EXISTING REMOVED OVEN). CONNECT TO EXISTING COLD WATER. MODIFY AS NEEDED TO MAKE CONNECTION TO NEW OVEN. RUN NEW DRAIN TO HUB DRAIN. CONNECT TO NEW FILTERED WATER.

NOTE TO CONTRACTOR ON EXISTING CONDITIONS

- CONTRACTOR SHALL VISIT THE SITE PRIOR TO BID AND SURVEY ALL EXISTING CONDITIONS AND EQUIPMENT PRIOR TO SUBMITTING BID FOR WORK REQUIRED BY THESE DOCUMENTS.
- IF AT ANY TIME THERE IS DISCREPANCY BETWEEN THE PLANS AND SPECS, OR CONFUSION/CONCERN OVER REQUIRED WORK, CONTRACTOR SHALL IMMEDIATELY NOTIFY ARCHITECT, ENGINEER, AND/OR OWNER AND GET DIRECTION BEFORE PROCEEDING WITH WORK IN QUESTION.
- FOR ALL EXISTING EQUIPMENT TO BE RELOCATED AND OR RE-USED, CONTRACTOR SHALL BE RESPONSIBLE FOR DISCONNECTION, SAFE STORAGE, AND RECONNECTION OF SAID EQUIPMENT COMPLETELY.
- LOCATIONS OF EXISTING SYSTEMS ARE APPROXIMATE. CONTRACTOR SHALL FIELD VERIFY ALL SYSTEM LOCATIONS PRIOR TO WORK.

GENERAL NOTE :
REINSTALL PLUMBING FIXTURES AND CONNECT TO EXISTING PIPING IN AREAS AFTER NEW WALL FINISHES HAVE BEEN INSTALLED. REFER TO ARCHITECTURAL DRAWINGS FOR AREAS OF THE WORK.

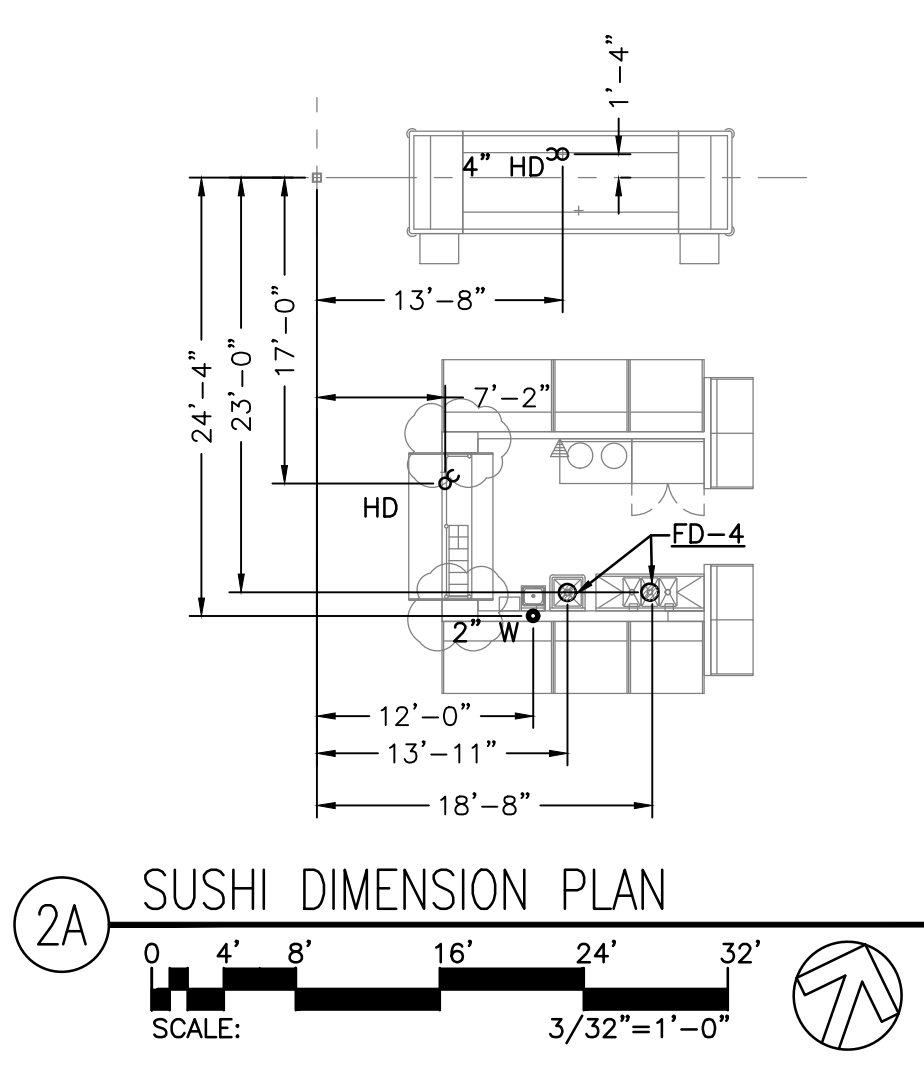

NOTE: THIS DOCUMENT MAY HAVE BEEN ELECTRONICALLY TRANSMITTED. IF UNSIGNED, IT CANNOT BE FILED FOR PUBLIC RECORD. PUBLIC RECORD FILINGS REQUIRE SIGNED AND SEALED DOCUMENTS.