

1 DOOR TYPES
A6.02 SCALE: 1/4"=1'

2 DOOR HEAD DETAILS
A6.02 SCALE: 1/4"=1'


3 DOOR JAMB DETAILS
A6.02 SCALE: 1/4"=1'

DOOR SCHEDULE NOTES:

- REFER TO FOOD LION SPECIFICATIONS & NATIONAL ACCOUNT REFERENCES FOR DOOR MANUFACTURERS.
- NOT USED.
- ALL PREP TRAFFIC DOORS TO RECEIVE "TEAR-DROP" BUMPERS ON BOTH SIDES OF THE DOOR. BUMPERS SUPPLIED BY DOOR MANUFACTURER.
- NEW TRAFFIC DOORS TO RECEIVE GASKETS AROUND DOOR PERIMETER. GASKETS SUPPLIED BY DOOR MANUFACTURER. (REFER TO SCOPE OF WORK)
- STORE NUMBER TO BE STENCILED (4" HIGH) TO TRUCK DRIVERS (DSD) DOOR IN PAINT COLOR CONTRASTING TO COLOR OF DOOR.
- DOOR SCOPE TO BE PART NO. 50191 FROM WARNOK-HERSEY HARDWARE DISTRIBUTOR. (800) 632-1324.
- PROVIDE 1/4" WIRE SAFETY GLASS PER NCSBC-2406.4.1 IN HALF GLASS DOOR WINDOW-APPLICABLE TO ALL OFFICES.
- ALL NEW EXTERIOR DOORS & WINDOWS TO COMPLY W/ NCEBC 811.1.1
- GENERAL CONTRACTOR SHALL INSTALL KICKPLATES ON BOTH SIDES OF ALL SOLID CORE WOOD & HOLLOW METAL DOORS. (EXCEPTION- EXTERIOR EXTERIOR DOORS). REPLACE MISSING AND DAMAGED KICKPLATES.
- THE GENERAL CONTRACTOR SHALL SAND, CLEAN, AND REPAINT ALL EXISTING SOLID CORE WOOD & HOLLOW METAL DOORS & FRAMES SCHEDULED FOR REUSE. (AFTER PAINTING) AND COMMERCIAL GRADE KICK DOWNS ON ALL INTERIOR HOLLOW METAL DOORS. (EXCEPT WORKROOM WITH SAFETY).
- THE GENERAL CONTRACTOR SHALL VERIFY CONDITION OF ALL DOORS AND COORDINATE THE REUSE WITH THE FOOD LION CONSTRUCTION MANAGER.
- DOCK DOORS, SEALS, DOCK LEVELER AND EQUIPMENT SHALL BE ORDERED FROM OVERHEAD DOOR AS PER FOOD LION SPECIFICATIONS. REFER TO NATIONAL ACCOUNT REFERENCE INFORMATION. SCOPE OF WORK, & COORDINATE W/ FOOD LION CONSTRUCTION MANAGER.
- TRAFFIC DOORS TO BE ORDERED FROM CHASE DURAS AT HEFCO. REFER TO NATIONAL ACCOUNT INFORMATION.
- HOLLOW METAL DOORS, FRAMES AND HARDWARE SHALL BE ORDERED FROM B.A. HOFT. GENERAL CONTRACTOR MUST ORDER NEW DELAY EGRESS STICKERS FROM B.A. HOFT ONCE THE DOORS ARE REPAINTED. REFER TO NATIONAL ACCOUNT INFORMATION.
- ALL JAMB GUARDS, MISC ALUMINUM, STAINLESS STEEL, ETC. BREAK METAL ITEMS SHALL BE FIELD VERIFIED, FABRICATED AND INSTALLED GENERAL CONTRACTOR. GENERAL CONTRACTOR SHALL REPLACE MISSING OR DAMAGED WEATHER-STRIPPING, SWEEPS & NEW STYLE CARPET THRESHOLDS ON ALL EXTERIOR DOORS (INCLUDING AUTOMATIC DOORS), ROLL-UP DOORS 5-3/8" BRUSH GASKET-MFR/MODEL #ND15642 BY NATIONAL GUARD.
- G.C. TO ADJUST INTERIOR DOOR CLOSERS SO THAT NO MORE THAN 5 LBS OF FORCE IS REQUIRED TO OPERATE AND SO THAT DOORS GO FROM 90 DEGREE OPEN TO 12 DEGREE OPEN IN 5 SECONDS MIN.
- E-COMMERCE DOOR REQUIREMENTS
 - ALUMINUM/GLASS-MEDIUM-STYLE DOOR WITH 10" BOTTOM RAIL, 6" MDRAIL @ 36" AFF BY GENERAL CONTRACTOR.
 - 4 1/2" DEEP ALUMINUM FRAME TO MATCH STOREFRONT FINISH.
 - GLASS TO BE 1" INSULATED CLEAR TEMPERED GLASS.
 - GENERAL CONTRACTOR WILL PROVIDE AND INSTALL:
 - VON DUPRIN PUSH BAR
 - JUNCTION BOXES
 - DOOR, DOOR FRAME, GLASS, DOOR HARDWARE
 - DOOR MANUFACTURER PROVIDED OFFSET HINGES, OVERHEAD DOOR CLOSER (90 DEGREE SET), EXTERIOR TO STYLE PULL HANDLE, ALUMINUM THRESHOLD, DOOR SWEEP AND WEATHER STRIPPING.
 - FOOD LION ASSET PROTECTION PROVIDES/INSTALLS FOOT READER (INTERIOR/EXTERIOR)
 - ELECTRIC STRIKER PLATE AND KEY FOOT LOCK RELEASES ON INTERIOR AND EXTERIOR OF BUILDING
 - GLASS BREAK / MOTION SENSORS TO BE EVALUATED BY FOOD LION ASSET PROTECTION TEAM
- EXTERIOR SIDE OF DOOR/FRAME TO BE PREPPED FOR PAINT AND REPAINTED TO MATCH EXISTING COLOR.
- EXISTING AUTOMATIC DOORS TO BE PAINTED SW 7055 "ENDURING BRONZE".

DOOR SCHEDULE		NOTE:		REMARKS											
NO	SIZE	LOCATION	RM.	HRDW.	TYP	E	FRAME	HEAD	JAMB	SILL	FRAME COLOR	DOOR FINISH	NOTES AND COMMENTS		
100A*	PR-2'-6"x6'-10"x1 3/4"	EXIST	VESTIBULE	100	HW-01	1	EXIST ALUM	EXIST	EXIST	EXIST	FACTORY	FACTORY	EXISTING MOTION DETECTORS ON BOTH SIDES - NEW DETECTORS TO BE SUPPLIED BY ASSA ABLOY ENTRANCE SOLUTIONS 1-609-249-9492 SEE DOOR SCHEDULE NOTES #17 & 21. DOOR FINISH TO MATCH EXISTING STOREFRONT COLOR. AT DOOR JAMBS, INSTALL NEW METAL STRIPS		
100B*	3'-0"x6'-10"x1 3/4"	EXIST	VESTIBULE	100	HW-01	1	EXIST ALUM	EXIST	EXIST	EXIST	FACTORY	FACTORY	EXISTING MOTION DETECTORS ON BOTH SIDES - NEW DETECTORS TO BE SUPPLIED BY ASSA ABLOY ENTRANCE SOLUTIONS 1-609-249-9492 SEE DOOR SCHEDULE NOTES #17 & 21. DOOR FINISH TO MATCH EXISTING STOREFRONT COLOR. AT DOOR JAMBS, INSTALL NEW METAL STRIPS		
100C*	PR-2'-6"x6'-10"x1 3/4"	EXIST	VESTIBULE	100	HW-01	1	EXIST ALUM	EXIST	EXIST	EXIST	FACTORY	FACTORY	EXISTING MOTION DETECTORS ON BOTH SIDES - NEW DETECTORS TO BE SUPPLIED BY ASSA ABLOY ENTRANCE SOLUTIONS 1-609-249-9492 SEE DOOR SCHEDULE NOTES #17 & 21. DOOR FINISH TO MATCH EXISTING STOREFRONT COLOR. AT DOOR JAMBS, INSTALL NEW METAL STRIPS		
101A*	PR-2'-6"x6'-10"x1 3/4"	EXIST	SALES	101	HW-01	1	EXIST ALUM	EXIST	EXIST	EXIST	FACTORY	FACTORY	EXISTING MOTION DETECTORS ON BOTH SIDES - NEW DETECTORS TO BE SUPPLIED BY ASSA ABLOY ENTRANCE SOLUTIONS 1-609-249-9492 SEE DOOR SCHEDULE NOTES #17 & 21. DOOR FINISH TO MATCH EXISTING STOREFRONT COLOR. AT DOOR JAMBS, INSTALL NEW METAL STRIPS		
101B*	3'-0"x7'-0"x1 3/4"	EXIST	SALES	101	HW-05	2	EXIST HM	EXIST	EXIST	EXIST	INT P-3(B) / EXT TO MATCH EXISTING COLOR	INT P-3(B) / EXT TO MATCH EXISTING COLOR	SEE REMARKS #1&2. SEE DOOR SCHEDULE NOTES #9,11,15		
102	3'-6"x7'-0"	NEW	E-COMMERCE ROOM	102	-	-	-	H-1	J-1	N/A	STAINLESS STEEL WRAP	N/A	OPENING ONLY		
103*	3'-0"x7'-0"x1 3/4"	EXIST	ASSOCIATE'S TRAINING ROOM	103	HW-05	4	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
104*	3'-0"x7'-0"x1 3/4"	EXIST	WORK ROOM	104	HW-12	3	EXIST HM	EXIST	EXIST	N/A	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
105*	3'-0"x7'-0"x1 3/4"	EXIST	STORAGE OFFICE	105	HW-05	4	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
106*	3'-0"x7'-0"x1 3/4"	EXIST	HBC ROOM	106	HW-12	2	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
107*	3'-0"x7'-0"x1 3/4"	EXIST	MOP CLOSET	107	HW-08	2	EXIST HM	EXIST	EXIST	-	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
111A*	3'-0"x7'-0"x1 3/4"	EXIST	MECHANICAL ROOM	114	HW-09	2	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12		
111B*	3'-0"x7'-0"x1 3/4"	EXIST	MECHANICAL ROOM	114	HW-03	2	EXIST HM	EXIST	EXIST	EXIST	INT P-3(B) / EXT TO MATCH EXISTING COLOR	INT P-3(B) / EXT TO MATCH EXISTING COLOR	SEE REMARKS #1&2. SEE DOOR SCHEDULE NOTES #9,11,15,17,20		
113A*	4'-0"x7'-0"x1 3/4"	EXIST	GROCERY STAGING / RECEIVING	113	HW-03	2	EXIST HM	EXIST	EXIST	EXIST	INT P-3(B) / EXT TO MATCH EXISTING COLOR	INT P-3(B) / EXT TO MATCH EXISTING COLOR	SEE REMARKS #1&2. SEE DOOR SCHEDULE NOTES #9,11,15,17,20		
113B*	8'-0"x8'-0"x1"	EXIST	RECEIVING OVERHEAD	113	HW-07	9	EXIST BENT PLATE	EXIST	EXIST	EXIST	FACTORY	FACTORY	STEEL ROLL-UP DOOR- SEE DOOR SCHEDULE NOTES #13,17		
113C*	8'-0"x8'-0"x1"	EXIST	RECEIVING OVERHEAD	113	HW-07	9	EXIST BENT PLATE	EXIST	EXIST	EXIST	FACTORY	FACTORY	SEE REMARKS #1&2. SEE DOOR SCHEDULE NOTES #9,11,15,17,20		
113D*	4'-0"x7'-0"x1 3/4"	EXIST	GROCERY STAGING / RECEIVING	113	HW-03	2	EXIST HM	EXIST	EXIST	EXIST	INT P-3(B) / EXT TO MATCH EXISTING COLOR	INT P-3(B) / EXT TO MATCH EXISTING COLOR	SEE DOOR SCHEDULE NOTES #3,14,16.		
113E*	PR-3'-0"x7'-10"x1"	EXIST	GROCERY STAGING	113	HW-14	8	EXIST HM	EXIST	EXIST	S-2	P-3(B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16.		
113F*	PR-3'-6"x7'-0"x1"	EXIST	GROCERY STAGING	113	HW-14	8	EXIST HM	EXIST	EXIST	S-2	P-3(B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16.		
114A*	3'-6"x7'-0"x1"	EXIST	MEAT PREP	114	HW-13	14	EXIST HM	EXIST	EXIST	EXIST	INT P-4 (B)/GROCERY STAGING P-3 (B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16. EXISTING LARGE WINDOW PANEL.		
114B*	3'-6"x7'-0"x1"	EXIST	MEAT PREP	114	HW-13	12	EXIST HM	EXIST	EXIST	EXIST	INT P-4 (B)/ SALES P-3 (B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16.		
115*	3'-0"x7'-0"x1"	EXIST	MEAT OFFICE	115	HW-13	14	EXIST HM	EXIST	EXIST	N/A	P-4 (B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16.		
117*	3'-0"x7'-0"x1 3/4"	EXIST	DEPT. MANAGER'S OFFICE	117	HW-05	4	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
118*	3'-0"x7'-0"x1 3/4"	EXIST	LOUNGE	118	HW-10	4	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
119*	3'-0"x7'-0"x1 3/4"	EXIST	RESTROOM #2	119	HW-10C	2	EXIST HM	EXIST.	EXIST.	S-2	P-18(B)	P-18(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
120*	3'-0"x7'-0"x1 3/4"	EXIST	RESTROOM #3	120	HW-10C	2	EXIST HM	EXIST.	EXIST.	S-2	P-18(B)	P-18(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12. NO FAMILY SIGNAGE.		
121A	3'-9"x3'-6"x4"	NEW	DELI / BAKERY PREP	121	-	6	NEW ALUM	N/A	N/A	N/A	FACTORY	FACTORY	WALL MOUNTED		
121B	3'-6"x3'-6"x4"	NEW	DELI / BAKERY PREP	121	-	6	NEW ALUM	N/A	N/A	N/A	FACTORY	FACTORY	WALL MOUNTED		
122*	3'-0"x7'-0"x1"	EXIST	DELI / BAKERY STORAGE	122	HW-13	14	EXIST HM	EXIST.	EXIST.	N/A	P-18(B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16.		
123*	3'-0"x7'-0"x1 3/4"	EXIST	DELI / BAKERY CLOSET	123	HW-05	2	EXIST HM	EXIST.	EXIST.	N/A	P-18(B)	P-18(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
124*	3'-0"x7'-0"x1 3/4"	EXIST	STORAGE ROOM	124	HW-08	2	EXIST HM	EXIST	EXIST	-	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12. W/ HASP LOCK.		
125*	3'-0"x7'-0"x1 3/4"	EXIST	CORRIDOR #2	125	HW-05	2	EXIST HM	EXIST	EXIST	EXIST	INT P-3(B) / EXT TO MATCH EXISTING COLOR	INT P-3(B) / EXT TO MATCH EXISTING COLOR	SEE REMARKS #1&2. SEE DOOR SCHEDULE NOTES #9,11,15		
126*	PR-3'-0"x7'-0"x1"	EXIST	PRODUCE PREP	126	HW-14	11	EXIST HM	EXIST	EXIST	EXIST	INT P-4 (B) / SALES P-3 (B)	FACTORY	SEE DOOR SCHEDULE NOTES #3,14,16		
127*	3'-0"x7'-0"x1 3/4"	EXIST	RISER ROOM	127	HW-08	2	EXIST HM	EXIST	EXIST	-	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12.		
129*	3'-0"x7'-0"x1 3/4"	EXIST	WOMEN'S RESTROOM	129	HW-10B	2	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12,18.		
130*	3'-0"x7'-0"x1 3/4"	EXIST	MEN'S RESTROOM	130	HW-10A	2	EXIST HM	EXIST	EXIST	EXIST	P-3(B)	P-3(B)	SEE DOOR SCHEDULE NOTES #9,10,11,12,18.		

ALLIANCE ARCHITECTURE OF THE TRIAD
720 Coliseum Drive, Suite 112
Winston-Salem, NC 27106
Phone: 336-722-4447

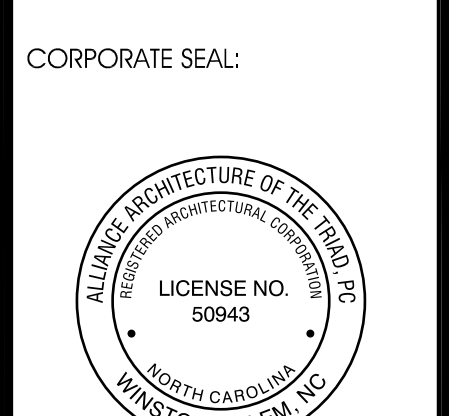

NO	DATE	REMARKS
1	00/00/00	COMMENTS

END

FOOD LION
2110 Executive Drive, Salisbury, NC 28145
Tel: 703.636.6260
foodlion.com
Food Lion is an Ahold Delhaize company.

FOOD LION REMODEL STORE #1657
4330 E. TENTH STREET
GREENVILLE, NC

PROJECT NO: 1657FLMK22
DATE: 08/29/2022
18 OF 40
A6.02
DOOR & WINDOW FINISH SCHEDULES
CHECKED: A.J.L. DRAWN: VFS