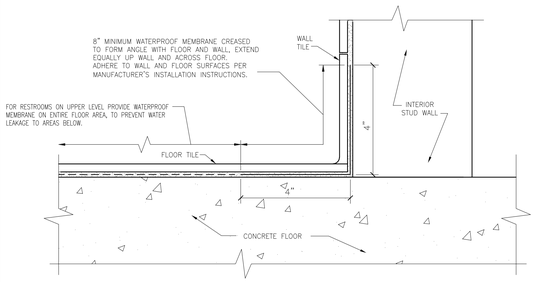

NOTES:

1. PROVIDE WATERPROOFING MEMBRANE OF POLYETHYLENE MATERIAL ON ALL INSIDE WALLS OF RESTROOMS, TO REDUCE WATER LEAKAGE FROM RESTROOM TO ADJACENT AREAS. SEE KROGER SPECIFICATIONS SECTION 09 30 00 THIN-SET TILING.
2. ONCE MEMBRANE HAS BEEN COMPLETELY BONDED -- SEAMS, CORNERS & CONNECTIONS -- THE FLOOR & WALL TILES MAY BE APPLIED.
3. OVERLAP WATERPROOFING MEMBRANE BEYOND PRE-FORMED CORNER, ADHERE TO WALL AND FLOOR SURFACES PER MANUFACTURER'S RECOMMENDATIONS.



OUTSIDE PRE-FORMED CORNER



INSIDE PRE-FORMED CORNER

WATERPROOFING MEMBRANE FOR RESTROOMS	DATE: 5/18/18 SCALE: NONE DRAWN: ZAW
MASTER SPECIFICATION DETAIL	ASD-164

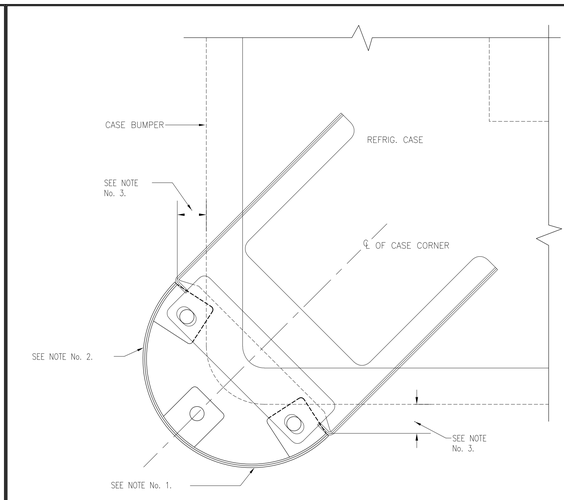

NOTES:

1. DESIGNED FOR USE WITH ISLAND REFRIGERATED CASES (WITH STRAIGHT FRONTS) IN DAIRY, MEAT, SEAFOOD AND DELI DEPARTMENTS. CASE CORNER GUARD. REFER TO SECTION 11 41 13 PARAGRAPH 2.2 B GENERAL STORE FIXTURE INSTALLATION IN SPECIFICATIONS. REFER TO FIXTURE PLAN FOR QUANTITY AND LOCATIONS.
2. CASE CORNER GUARD TO BE INSTALLED, AFTER CASE HAS BEEN SET. INSTALL CASE GUARD (AND FLANGE EXTENSION) AS CLOSE TO CASE AS POSSIBLE PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
3. MAXIMUM 1" PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
4. FOR CASES WITH SHALLOW TOE KICK IT MAY BE NECESSARY TO FIELD CUT FLANGE FOR PROPER POSITIONING OF GUARD.

Note:
Detail Based On Installation From National Cart Co. 45050009 (5050009 And 5050010).

REFRIGERATED CASE CORNER GUARD	DATE: 6/5/15 SCALE: NONE DRAWN: ZAW
MASTER SPECIFICATION DETAIL	ASD-160



DETAIL 'A'

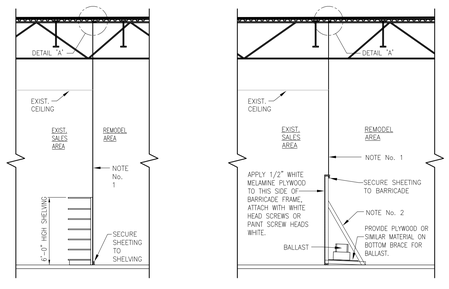

TYPE - 1
WITH-IN WALL REMODEL
WITH SHELVING

TYPE - 2
WITH-IN WALL REMODEL
WITHOUT SHELVING

NOTES:

1. 6 MIL FIRE RETARDANT (NFPA 701) POLYETHYLENE SHEETING DUST BARRIER -- USE WHITE, CLEAR OR FROSTED/TRANSLUCENT SHEETING ONLY, BLACK SHEETING IS NOT ACCEPTABLE. TAPE FULL LENGTH OF JOINT, SECURELY ATTACH TO EITHER BACK OF SHELVING OR 2" x 4" WOOD BRACE BARRICADE, AND EXTEND UP TO ROOF DECK AS INDICATED.
2. 2" x 4" WOOD BRACED BARRICADE 8'-0" HIGH, PROVIDE BALLAST ON BOTTOM BRACE TO SECURE BARRICADE IN PLACE. DO NOT NAIL TO FLOOR. (BALLAST -- i.e. -- CONCRETE BLOCKS, SANDBAGS or MISCELLANEOUS CONSTRUCTION MATERIALS). BALLAST & KICKERS SHALL BE ON THE WORK AREA SIDE AND NOT ON THE CUSTOMER ACCESS SIDE.
3. ANY PORTION OF THE SPRINKLER SYSTEM WHICH BECOMES EXPOSED TO POSSIBLE FREEZING TEMPERATURES MUST BE PROTECTED FROM FREEZING WITH HEAT TAPE & INSULATION.

TEMPORARY CONSTRUCTION BARRIERS	DATE: 7/31/19 SCALE: NONE DRAWN: DS/JQ/ZAW
MASTER SPECIFICATION DETAIL	ASD-162A

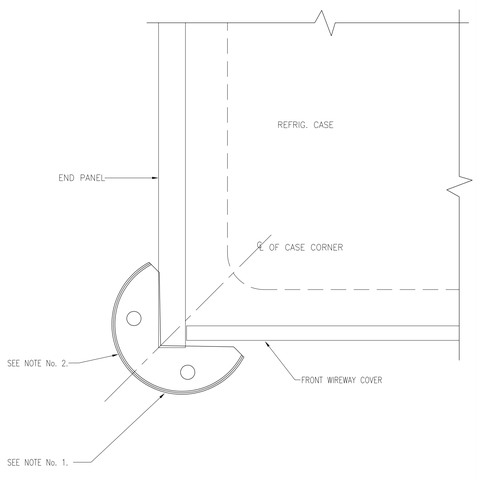

NOTES:

1. DESIGNED FOR USE WITH GLASS DOOR END CASES. CASE CORNER GUARD. REFER TO SECTION 11 41 13 PARAGRAPH 2.2 B GENERAL STORE FIXTURE INSTALLATION IN SPECIFICATIONS. REFER TO FIXTURE PLAN FOR QUANTITY AND LOCATIONS.
2. CASE CORNER GUARD TO BE INSTALLED, AFTER CASE HAS BEEN SET. INSTALL CASE GUARD AS CLOSE TO CASE AS POSSIBLE PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.

Note:
Detail Based On Installation Instructions From National Cart Co. 5050001.

Legend Number GE63CS. Height 12".

GLASS DOOR END CASE CORNER GUARD	DATE: 6/5/15 SCALE: NONE DRAWN: ZAW
MASTER SPECIFICATION DETAIL	ASD-160A

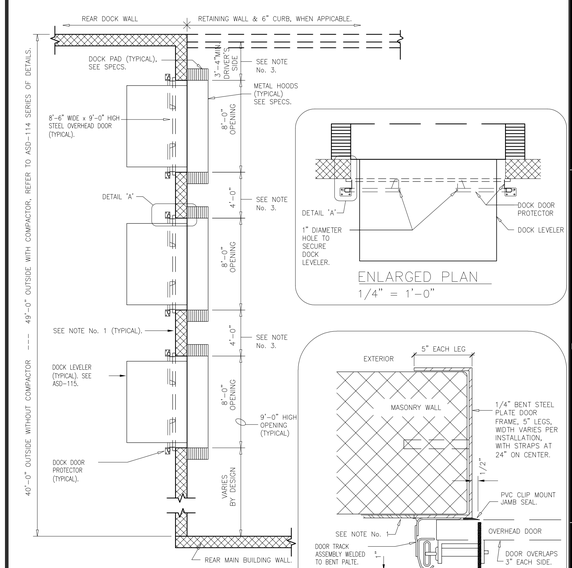

NOTE:

1. DOCK TRUCK UNLOADING LIGHT, SEE ASD-62, ASD-62A AND FIXTURE PLAN.
2. INSTALL DOOR PROTECTORS AT DOCK DOOR WITH LEVELER.
3. RECOMMENDED WIDTH CLEARANCE BETWEEN TRUCKS AND ADJACENT WALLS.

Detail Based on:
CorrStop LDP by McCue Corporation.
For 6' - 8' Wide Doors Part No. CSLDP-KIT

DOCK DOORS INSTALLATION	DATE: 1/30/15 SCALE: NONE DRAWN: ZAW
MASTER SPECIFICATION DETAIL	ASD-152

CAPSTONE
project services, plc
2211 WIDMAN WAY, SUITE 220
FORT MYERS, FL. 33901

COMMONWEALTH OF VIRGINIA
JOHN MARK HUGHES
Lic. No. 0401.014368
ARCHITECT

6-1-2020
SEAL

CAPSTONE
PROJECT SERVICES, PLC
ARCHITECTURAL & CONSTRUCTION SERVICES
OFFICE LOCATIONS: ROANOKE, VA & FT. MYERS, FL
CONSULTANT

A REMODEL FOR:
KROGER R-215
7480 LEE HIGHWAY
FAIRLAWN, VA
PROJECT

6-1-2020
DATE
CONSTRUCTION SET

KROGER STANDARD DETAILS
SHEET TITLE

MARK	DATE	DESCRIPTION
		REVISIONS

PROJECT NO:	CPS2020-051.4
CAD DWG FILE:	CPS2020-051.4-A5.0
DRAWN BY:	JMH
CHK'D BY:	JMH/LEN

A5.2
SHEET NO.