



STEVE W. HAAS, P.E.
 ELECTRICAL ENGINEER
 P.O. BOX 37291
 CHARLOTTE, NC
 (704) 333-4500
 steve@stevewhaasengineers.com

CONSULTANT

A REMODEL FOR:

KROGER R-215

FAIRLAWN, VA

7480 LEE HWY

PROJECT KROGER MID-ATLANTIC

6-1-2020

DATE CONSTRUCTION SET

ELECTRICAL DEMOLITION PLAN


SHEET TITLE

NO.	REVISIONS

PROJECT NO: 20201
 CAD DWG FILE: R-215 ED1.1
 DRAWN BY: WSM
 CHK'D BY: SWH

ED1.1

SHEET NO.

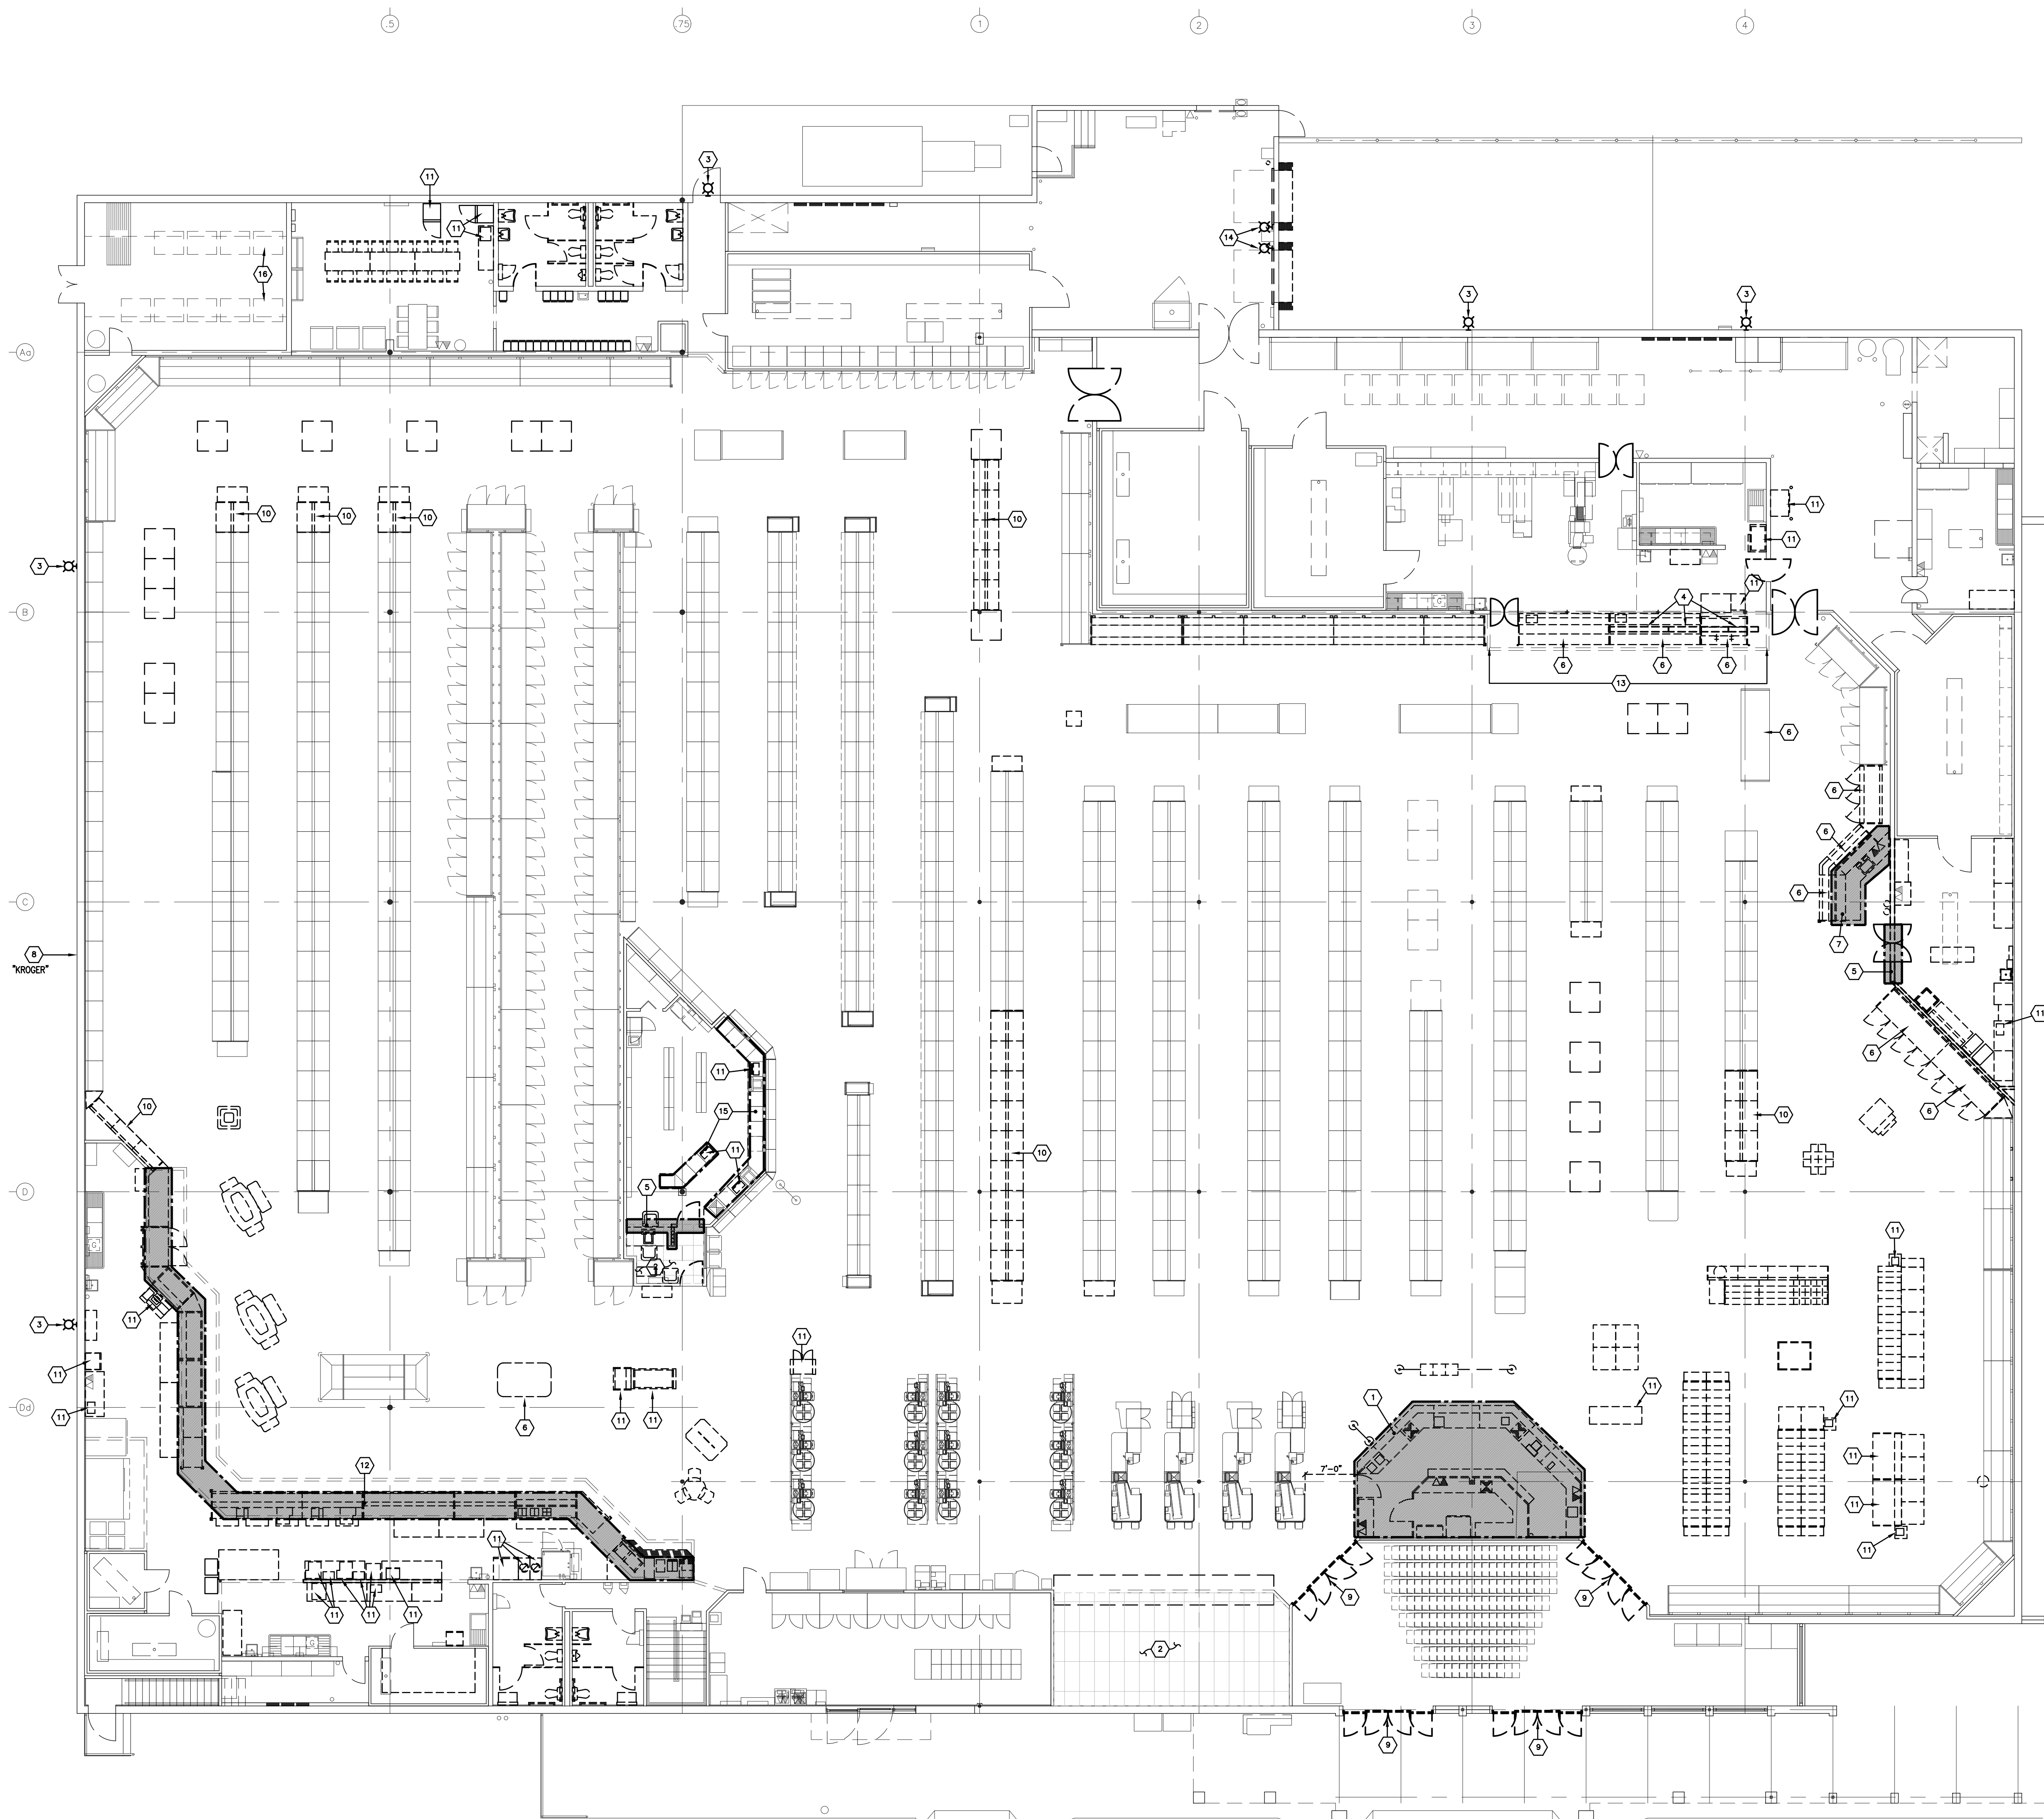

1 ELECTRICAL DEMOLITION PLAN
 ED1.1 3/32" = 1'-0"

ELECTRICAL DEMOLITION NOTES (TYPICAL)

- THE CONTRACTOR SHALL VISIT THE SITE AND INSPECT THE ELECTRICAL SYSTEMS PRIOR TO BID. DEMOLITION OF ELECTRICAL WORK SHALL FOLLOW THE ARCHITECTURAL WORK.
- REMOVE ALL ELECTRICAL DEVICES, CONDUIT AND WIRE FROM WALLS TO BE REMOVED AND ON WALLS WHERE NEW CONSTRUCTION CONFLICTS WITH EXISTING DEVICES IN THE REMODELED AREA.
- PROVIDE NEW TYPED PANEL DIRECTORIES FOR ALL PANELS ASSOCIATED WITH THIS WORK. SHOW EQUIPMENT NAMES AS INDICATED ON OWNERS DRAWINGS. PROVIDE DATE AT TOP OF DIRECTORY.
- CHASE AND PATCH EXISTING WALLS TO ABOVE SUSPENDED CEILING AS REQUIRED WHERE NEW DEVICES ARE INDICATED SUCH THAT DEVICES WILL BE FLUSH WITH WALL FINISH.
- THE CONTRACTOR SHALL VERIFY THE CONDITION OF THE EXISTING DEVICES IN AREAS OF NEW WORK. DEVICES THAT ARE IN NEED OF REPLACEMENT SHALL BE REMOVED.
- ALL FIXTURES CALLED FOR REMOVAL SHALL BE DISCARDED BY THIS CONTRACTOR, UNLESS NOTED OTHERWISE.
- REMOVE WIRE BACK TO SOURCE AND LABEL BREAKERS AS "SPARE" FOR ALL CIRCUITS THAT ARE NOT REUSED AND ARE INDICATED HERE TO BE REMOVED. COORDINATE WITH NEW WORK PLANS FOR REUSED CIRCUITS.

ELECTRICAL DEMOLITION NOTES (SPECIFIC)

- CUSTOMER SERVICE AND ACCOUNTING AREAS TO BE DEMOLISHED COMPLETE. REMOVE ALL ASSOCIATED DEVICES, CONDUIT, WIRE, ETC. REMOVE CONDUIT AND WIRE BACK TO SOURCE AND LABEL BREAKERS AS "SPARE" FOR NON-REUSED CIRCUITS.
- REMOVE ALL LIGHTING FIXTURES AND DEVICES IN EXISTING CEILING SYSTEM WHERE INDICATED AS NECESSARY TO ALLOW FOR CEILING REMOVAL / REPLACEMENT. FIELD VERIFY EXTENT OF WORK.
- ALL EXTERIOR WALLPACK LIGHTING FIXTURES TO BE REPLACED. FIELD VERIFY QUANTITIES AND LOCATIONS.
- REMOVE LIGHTING FIXTURES, ASSOCIATED CONDUIT, AND WIRE WHERE INDICATED. MAKE PROVISIONS NECESSARY TO MAINTAIN DOWNSTREAM LOADS. SEE E1.1 FOR CIRCUITRY AND FIXTURES TO BE REUSED.
- WALL COOLER PANEL OR SOFFIT TO BE DEMOLISHED. REMOVE ALL AFFECTED DEVICES, CONDUITS, WIRE, ETC. AS REQUIRED. MAKE PROVISIONS NECESSARY TO MAINTAIN DOWNSTREAM DEVICES.
- REFRIGERATED CASE TO BE REMOVED. COORDINATE WITH THE REFRIGERATION CONTRACTOR. DISCONNECT AS REQUIRED. REMOVE WIRE BACK TO SOURCE AND LABEL BREAKERS AS "SPARE" FOR NON-REUSED CIRCUITS.
- ENTIRE FLOOR COUNTER TO BE DEMOLISHED INCLUDING CASES, MILLWORK, EQUIPMENT, ETC. REMOVE ALL AFFECTED DEVICES, CONDUIT, WIRE, ETC. AS REQUIRED. FIELD VERIFY EXTENT OF WORK.
- STORE FRONT SIGN TO BE REMOVED. DISCONNECT AND REMOVE WIRE AND CONDUIT BACK TO SOURCE FOR NON-REUSED CIRCUITS. SEE E1.1 FOR NEW SIGN INFORMATION AND QUANTITY OF RE-USED CIRCUITS.
- DOOR TO BE REPLACED. DISCONNECT OPERATOR, SECURITY DEVICES, ETC. AS REQUIRED. CIRCUITRY TO REMAIN FOR RE-CONNECTION.
- SHELVING TO BE REMOVED. DISCONNECT AS REQUIRED. UNDERSLAB CIRCUITS TO BE RE-ROUTED OVERHEAD AND UTILIZED FOR NEW SHELVING.
- EQUIPMENT TO BE REMOVED. DISCONNECT AS REQUIRED. REMOVE WIRE BACK TO SOURCE AND LABEL NON-REUSED BREAKERS AS "SPARE".
- ENTIRE DELI/BAKERY LINE-UP TO BE DEMOLISHED INCLUDING CASES, MILLWORK, EQUIPMENT, ETC. REMOVE ALL AFFECTED DEVICES, CONDUIT, WIRE, ETC. AS REQUIRED. FIELD VERIFY EXTENT OF WORK.
- REMOVE DEVICES AND EQUIPMENT FROM MEAT/SEAFOOD CASE LINE-UP.
- REMOVE DOOR/TRUCK LIGHTS. RECEPTACLES TO REMAIN.
- REMOVE DEVICES, CONDUIT, WIRE, ETC. AS REQUIRED TO ALLOW FOR MILLWORK AND COUNTERTOP REPLACEMENT.
- DISCONNECT ABANDONED REFRIGERATION UNITS. COORDINATE LOCATIONS OF AFFECTED EQUIPMENT WITH THE REFRIGERATION CONTRACTOR. REMOVE CONDUIT AND WIRE BACK TO SOURCE AND LABEL NON-REUSED BREAKERS AS "SPARE".